


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 143.46 lm/W			
MODEL		I _{max} (cd)	1565	S/MH(C0/180)	1.35
NOMINAL POWER(W)	48	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	6812.0	η UP,DN(C0-180)	7.7,42.3
NOMINAL FLUX(lm)	6812.03	CIE CLASS	SEMI-D.	η UP,DN(C180-360)	7.7,42.3
LAMPS INSIDE	1	η up (%)	15.4	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	230	η down (%)	84.6	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

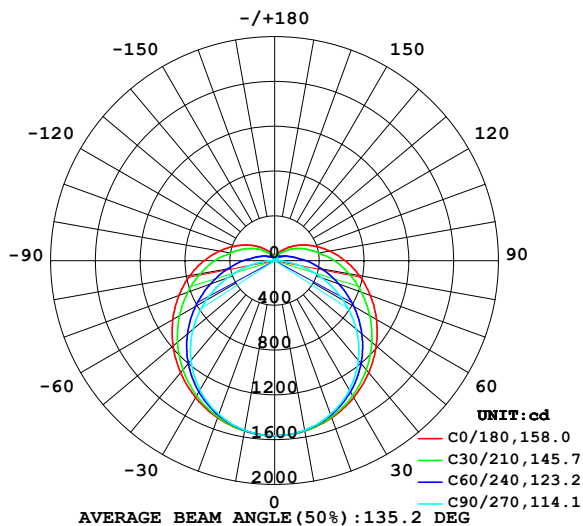

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

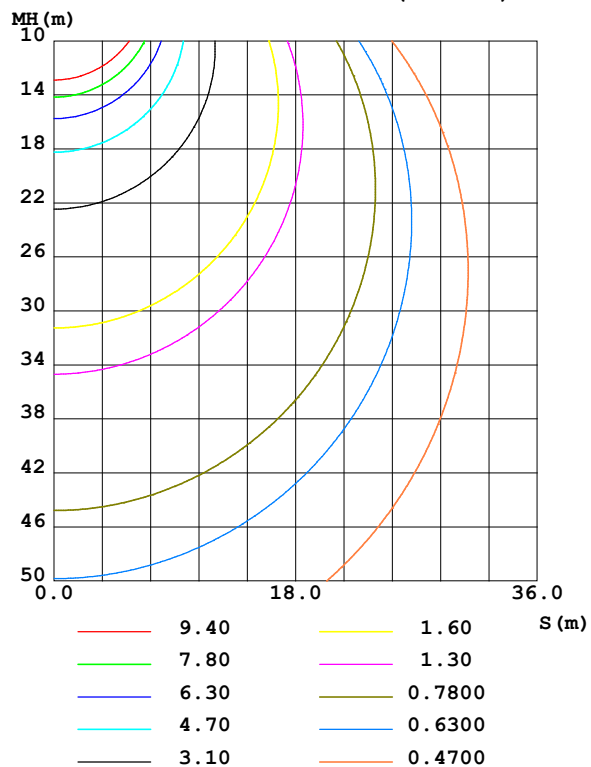

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2024-06-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:10.700m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1546	1542	1538	1542	1546	1542	1538	1542	0- 10	148.3	148.3	2.18,2.18
20	1493	1478	1461	1478	1493	1478	1461	1478	10- 20	428.0	576.3	8.46,8.46
30	1412	1374	1335	1374	1412	1374	1335	1374	20- 30	659.8	1236	18.1,18.1
40	1308	1238	1164	1238	1308	1238	1164	1238	30- 40	819.8	2056	30.2,30.2
50	1185	1075	950.1	1075	1185	1075	950.1	1075	40- 50	893.8	2950	43.3,43.3
60	1051	898.3	706.1	898.3	1051	898.3	706.1	898.3	50- 60	880.5	3830	56.2,56.2
70	909.8	718.2	446.1	718.2	909.8	718.2	446.1	718.2	60- 70	790.9	4621	67.8,67.8
80	767.8	550.0	195.9	550.0	767.8	550.0	195.9	550.0	70- 80	649.4	5271	77.4,77.4
90	630.2	408.0	10.33	408.0	630.2	408.0	10.33	408.0	80- 90	489.5	5760	84.6,84.6
100	500.7	290.0	13.50	290.0	500.7	290.0	13.50	290.0	90-100	356.0	6116	89.8,89.8
110	383.2	210.4	17.39	210.4	383.2	210.4	17.39	210.4	100-110	256.4	6372	93.5,93.5
120	281.8	149.5	21.33	149.5	281.8	149.5	21.33	149.5	110-120	176.1	6549	96.1,96.1
130	198.2	101.4	25.15	101.4	198.2	101.4	25.15	101.4	120-130	114.6	6663	97.8,97.8
140	133.6	71.20	28.99	71.20	133.6	71.20	28.99	71.20	130-140	68.82	6732	98.8,98.8
150	87.41	54.31	32.72	54.31	87.41	54.31	32.72	54.31	140-150	40.89	6773	99.4,99.4
160	56.87	44.42	36.08	44.42	56.87	44.42	36.08	44.42	150-160	23.33	6796	99.8,99.8
170	43.14	40.44	38.78	40.44	43.14	40.44	38.78	40.44	160-170	12.12	6808	99.9,99.9
180	37.30	39.59	40.16	39.59	37.30	39.59	40.16	39.59	170-180	3.804	6812	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2499.1 lm

%lum = 36.7%

%lamp = 36.7%

Conical surface Flux(120deg): 3830.1 lm

%lum = 56.2%


%lamp = 56.2%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:QC
 Test Date:2024-06-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
 Humidity:65.0%
 Test Distance:10.700m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

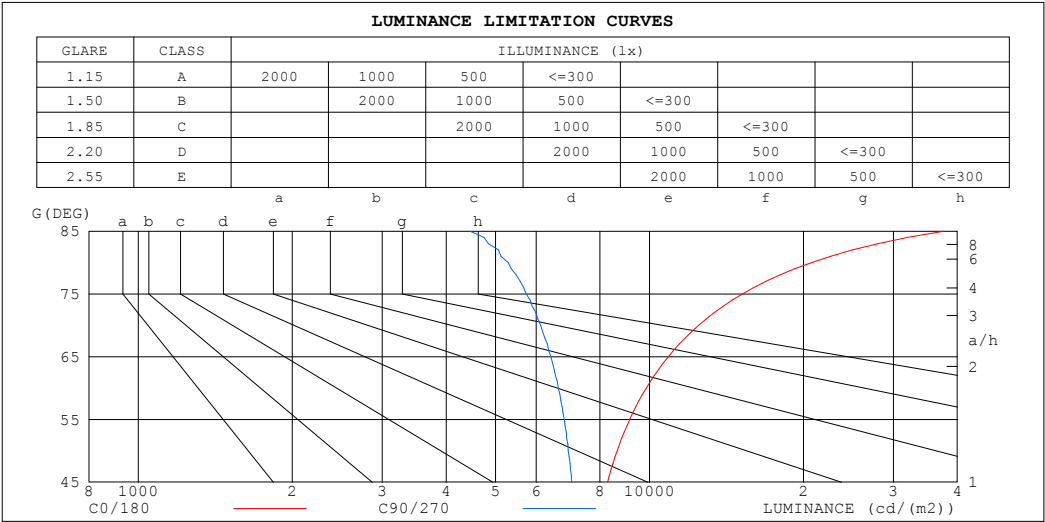

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	37565	4459
80	20735	5295
75	15192	5742
70	12474	6121
65	10881	6412
60	9852	6627
55	9146	6814
50	8645	6936
45	8277	7040


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:QC
Test Date:2024-06-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:10.700m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.15	1.15	1.15	1.11	1.11	1.11	1.03	1.03	1.03	.95	.95	.95	.88	.88	.88	.85
1.0	.96	.91	.86	.93	.88	.83	.85	.81	.78	.79	.76	.73	.73	.70	.68	.65
2.0	.82	.75	.68	.79	.72	.66	.73	.67	.62	.67	.63	.58	.62	.58	.55	.52
3.0	.72	.63	.55	.69	.61	.54	.64	.57	.51	.59	.53	.48	.54	.49	.45	.42
4.0	.63	.53	.46	.60	.52	.45	.56	.49	.43	.52	.46	.40	.48	.43	.38	.35
5.0	.56	.46	.39	.54	.45	.38	.50	.42	.36	.46	.40	.35	.43	.37	.33	.30
6.0	.50	.41	.34	.48	.39	.33	.45	.37	.32	.42	.35	.30	.39	.33	.29	.26
7.0	.45	.36	.30	.44	.35	.29	.41	.33	.28	.38	.31	.26	.35	.30	.25	.23
8.0	.41	.32	.26	.40	.31	.26	.37	.30	.25	.35	.28	.24	.32	.27	.22	.20
9.0	.38	.29	.23	.36	.28	.23	.34	.27	.22	.32	.26	.21	.30	.24	.20	.18
10.0	.34	.26	.21	.33	.26	.21	.31	.25	.20	.29	.23	.19	.28	.22	.18	.16

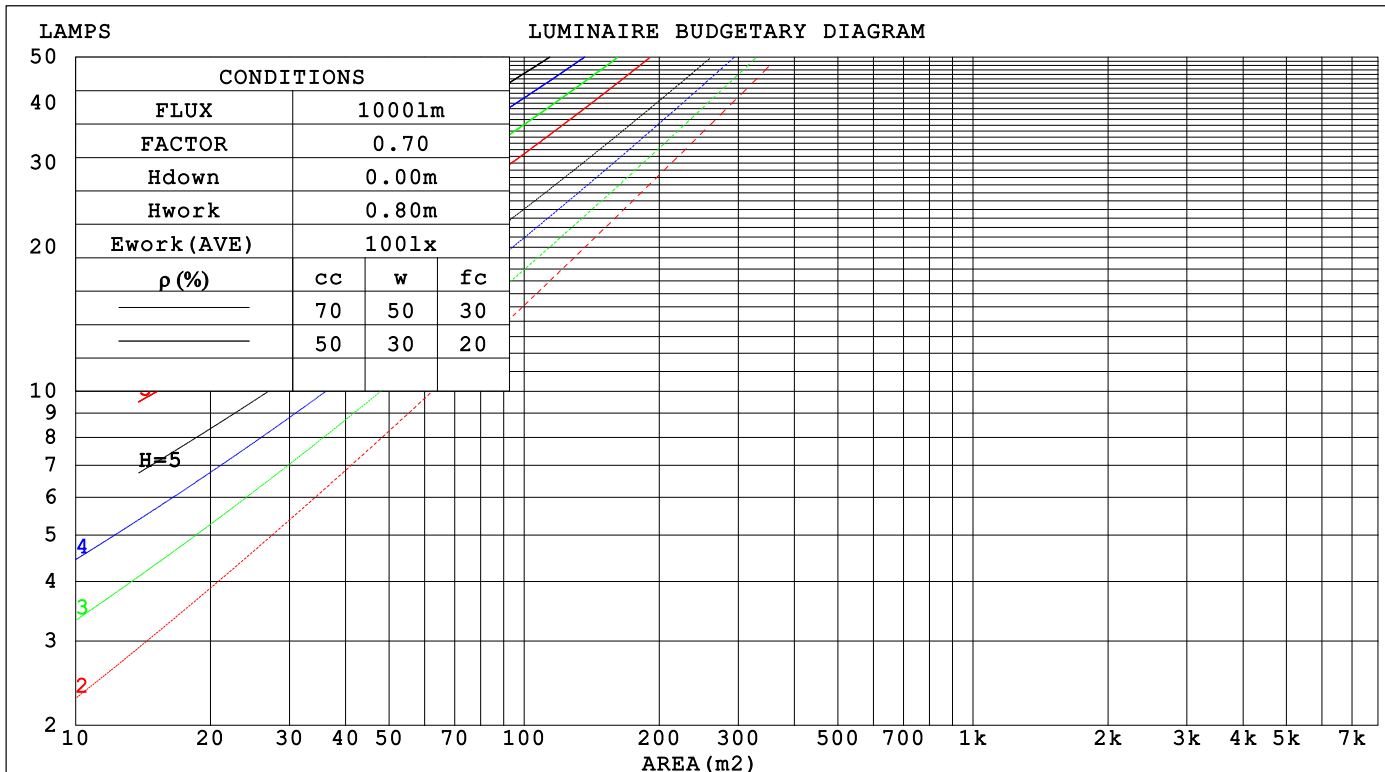

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2024-06-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:10.700m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.382	.217	.069	.370	.211	.067	.348	.200	.064	.327	.189	.061	.308	.179	.058		
2.0	.332	.182	.056	.321	.177	.055	.301	.168	.052	.283	.159	.050	.265	.150	.047		
3.0	.296	.157	.047	.286	.153	.046	.268	.145	.044	.251	.138	.042	.235	.130	.040		
4.0	.267	.139	.041	.258	.135	.040	.241	.128	.038	.226	.121	.037	.212	.115	.035		
5.0	.242	.124	.036	.235	.120	.035	.220	.114	.034	.206	.109	.032	.193	.103	.031		
6.0	.222	.111	.032	.215	.109	.031	.201	.103	.030	.189	.098	.029	.177	.093	.028		
7.0	.205	.101	.029	.199	.099	.028	.186	.094	.027	.174	.089	.026	.164	.085	.025		
8.0	.190	.093	.026	.184	.091	.026	.173	.086	.025	.162	.082	.024	.152	.078	.023		
9.0	.177	.086	.024	.172	.084	.024	.161	.080	.023	.152	.076	.022	.142	.072	.021		
10.0	.166	.080	.022	.161	.078	.022	.151	.074	.021	.142	.071	.020	.134	.067	.019		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.308	.308	.308	.263	.263	.263	.180	.180	.180	.103	.103	.103	.033	.033	.033		
1.0	.304	.274	.247	.260	.235	.213	.178	.162	.147	.102	.094	.086	.033	.030	.028		
2.0	.297	.251	.213	.254	.216	.184	.174	.150	.128	.101	.087	.075	.032	.028	.024		
3.0	.290	.235	.191	.248	.202	.165	.170	.141	.116	.098	.082	.068	.032	.027	.022		
4.0	.282	.222	.176	.242	.192	.153	.166	.134	.108	.096	.078	.064	.031	.025	.021		
5.0	.274	.212	.166	.235	.184	.145	.162	.128	.102	.094	.075	.061	.030	.025	.020		
6.0	.267	.204	.159	.229	.177	.139	.158	.124	.098	.092	.073	.058	.030	.024	.019		
7.0	.259	.197	.154	.223	.171	.134	.154	.120	.095	.090	.071	.057	.029	.023	.019		
8.0	.253	.192	.150	.218	.166	.131	.151	.117	.093	.088	.069	.055	.028	.023	.018		
9.0	.246	.187	.147	.212	.162	.128	.147	.114	.091	.086	.067	.054	.028	.022	.018		
10.0	.241	.183	.144	.207	.159	.126	.144	.112	.090	.084	.066	.053	.027	.022	.018		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2024-06-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:10.700m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm										
NAME: TI60LE-LC-48-1500K-40H-R8					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.2	14.6	13.7	15.1	15.6	11.7	13.1	12.2	13.6	14.1
3H	15.8	17.1	16.3	17.6	18.2	13.3	14.6	13.8	15.1	15.7
4H	17.3	18.5	17.8	19.0	19.6	14.0	15.2	14.5	15.7	16.3
6H	18.8	20.0	19.4	20.5	21.1	14.5	15.7	15.1	16.2	16.8
8H	19.7	20.9	20.3	21.4	22.0	14.7	15.8	15.2	16.4	17.0
12H	20.7	21.8	21.3	22.4	23.0	14.8	15.9	15.4	16.4	17.1
4H 2H	13.8	15.1	14.4	15.6	16.2	12.7	13.9	13.2	14.5	15.0
3H	16.7	17.7	17.2	18.3	18.9	14.6	15.7	15.1	16.2	16.8
4H	18.3	19.3	18.9	19.9	20.5	15.4	16.4	16.0	17.0	17.7
6H	20.1	21.0	20.7	21.6	22.3	16.2	17.1	16.8	17.7	18.4
8H	21.1	21.9	21.7	22.5	23.3	16.4	17.3	17.1	17.9	18.6
12H	22.2	23.0	22.9	23.6	24.4	16.6	17.4	17.3	18.0	18.8
8H 4H	18.6	19.5	19.3	20.1	20.8	16.3	17.2	17.0	17.8	18.5
6H	20.7	21.4	21.4	22.1	22.9	17.4	18.1	18.1	18.8	19.5
8H	22.0	22.6	22.6	23.3	24.0	17.9	18.5	18.6	19.2	20.0
12H	23.4	23.9	24.1	24.6	25.4	18.3	18.9	19.0	19.6	20.4
12H 4H	18.7	19.4	19.3	20.1	20.8	16.6	17.4	17.3	18.1	18.8
6H	20.9	21.5	21.5	22.2	22.9	17.9	18.6	18.6	19.2	20.0
8H	22.2	22.7	22.9	23.4	24.2	18.6	19.1	19.3	19.8	20.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 6812 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 6.7)
Area: 0.2132 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2024-06-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:10.700m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	49	36	29	48	36	29	46	35	28	22
0.80	58	45	37	56	44	37	54	43	36	28
1.00	66	53	45	64	52	44	61	53	43	34
1.25	73	60	52	70	59	51	66	57	49	40
1.50	78	66	57	75	64	56	71	61	54	44
2.00	85	74	66	82	72	65	77	68	62	51
2.50	89	79	72	86	77	70	80	73	67	55
3.00	93	84	77	90	82	75	83	77	71	58
4.00	98	90	84	94	87	81	87	82	77	63
5.00	101	94	88	97	91	86	90	85	81	66
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:QC
Test Date:2024-06-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:10.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

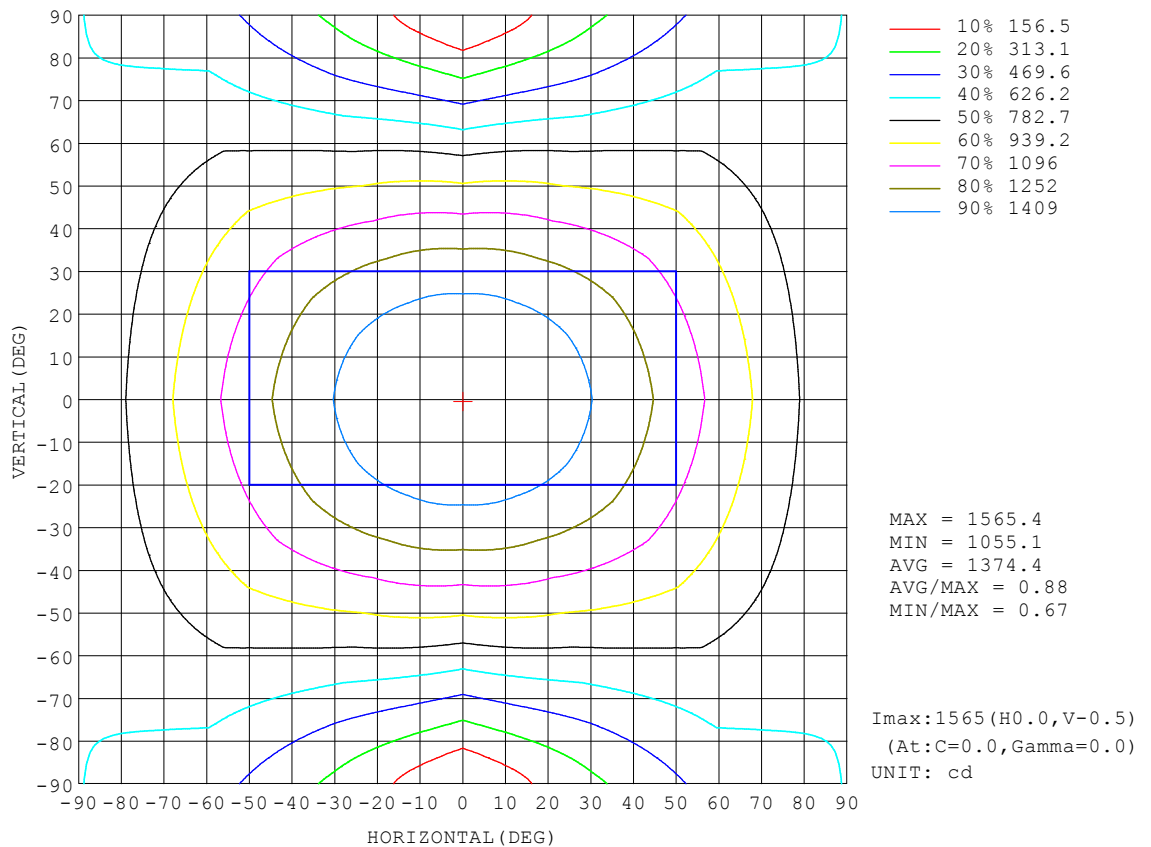


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:QC
Test Date:2024-06-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:10.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

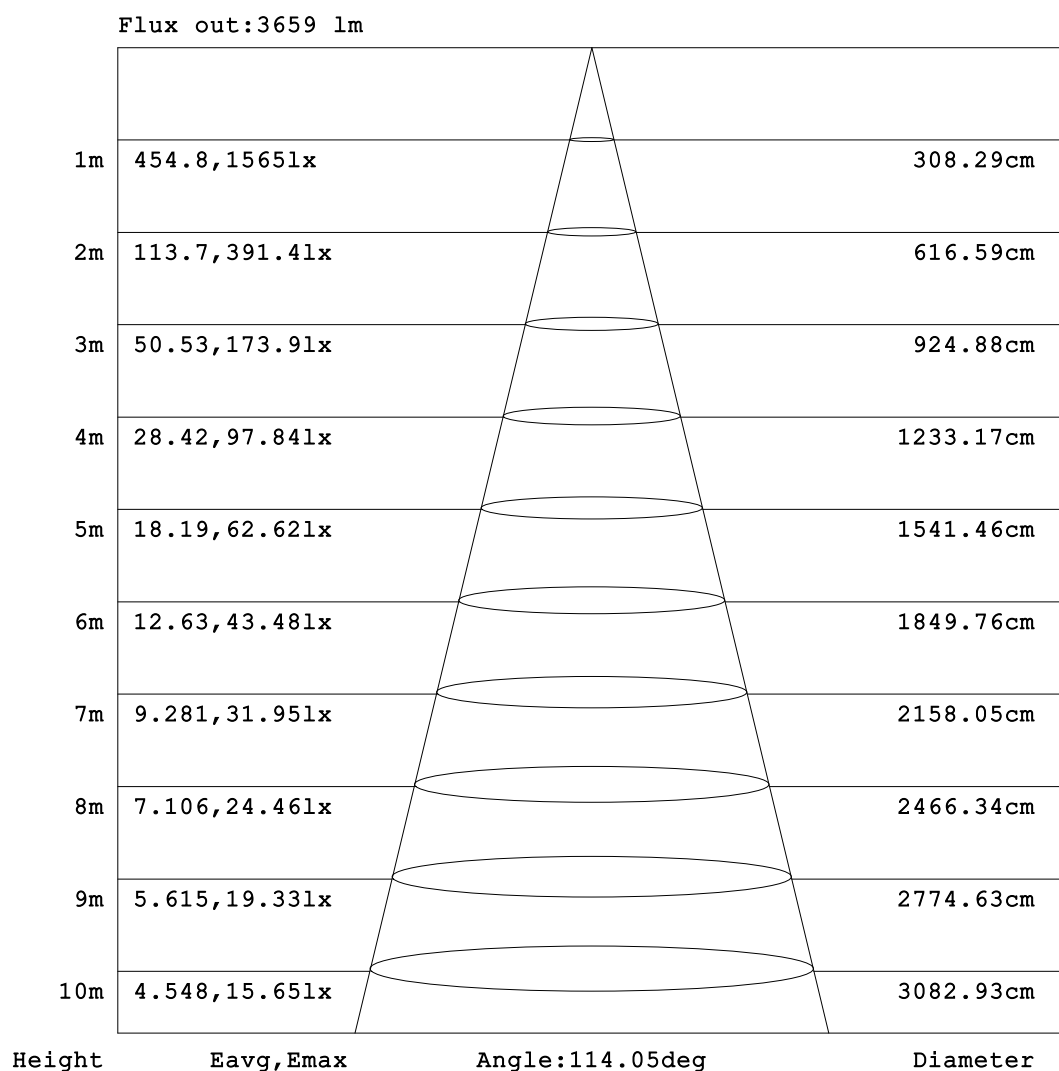


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:QC
 Test Date:2024-06-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
 Humidity:65.0%
 Test Distance:10.700m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test: U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz UTHDi: 0.00% ITHDi: 0.00% KDisp: 0 Lamp Flux: 6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

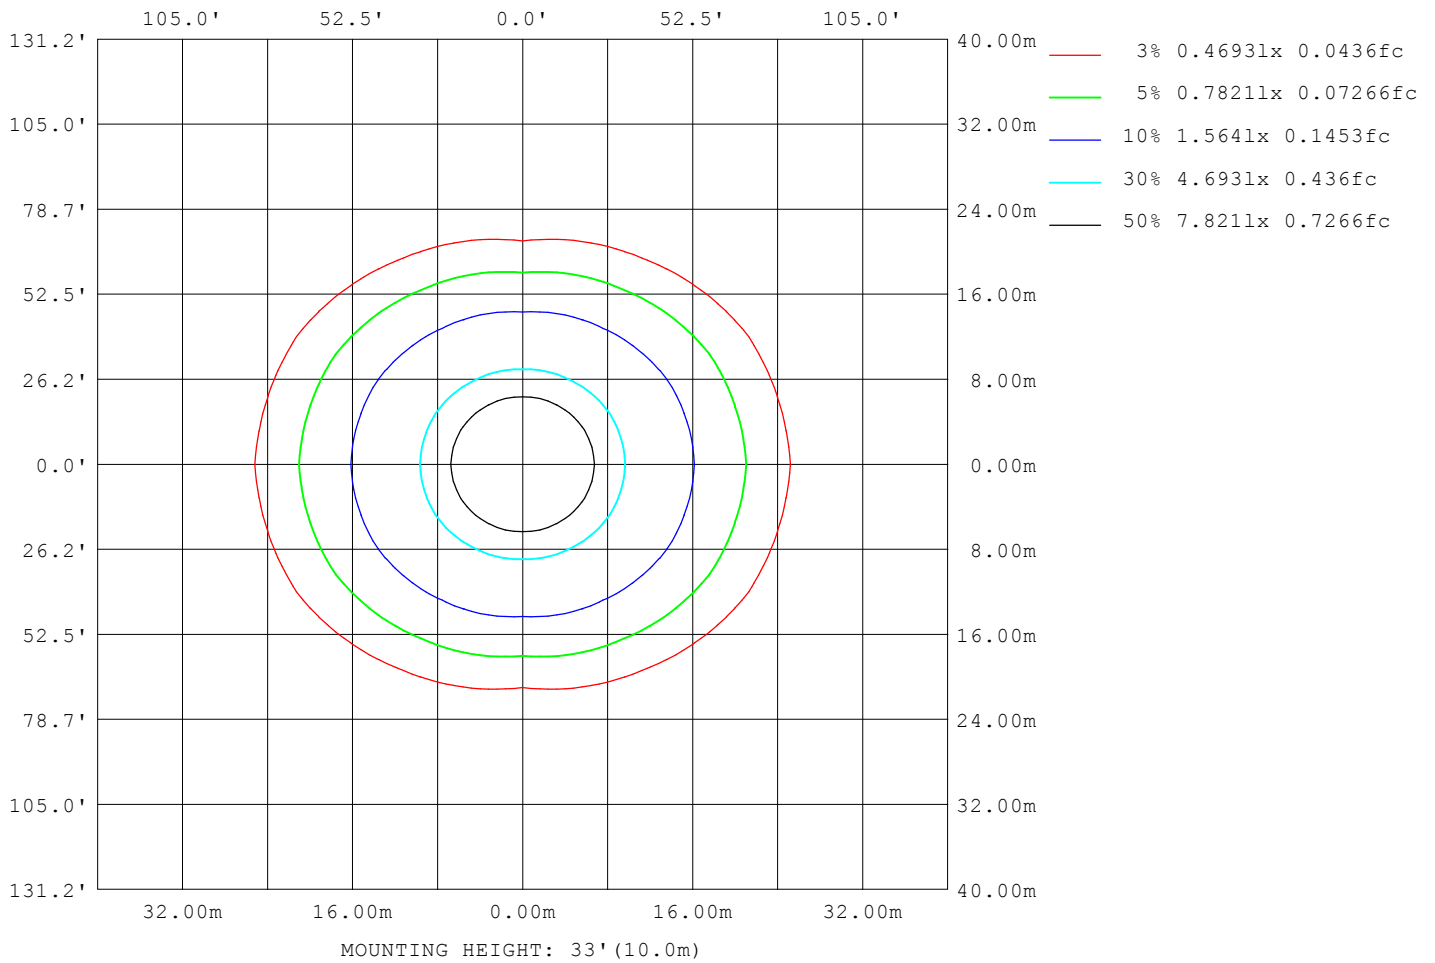

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: QC
 Test Date: 2024-06-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.458
 Humidity: 65.0%
 Test Distance: 10.700m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10883
L_0~180 (75) av	15196
L_0~180 (85) av	37574
L_90~270 (65) av	6409
L_90~270 (75) av	5740
L_90~270 (85) av	4457
L_45 (65) av	9000
L_45 (75) av	11575
L_45 (85) av	26141

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2024-06-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:10.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

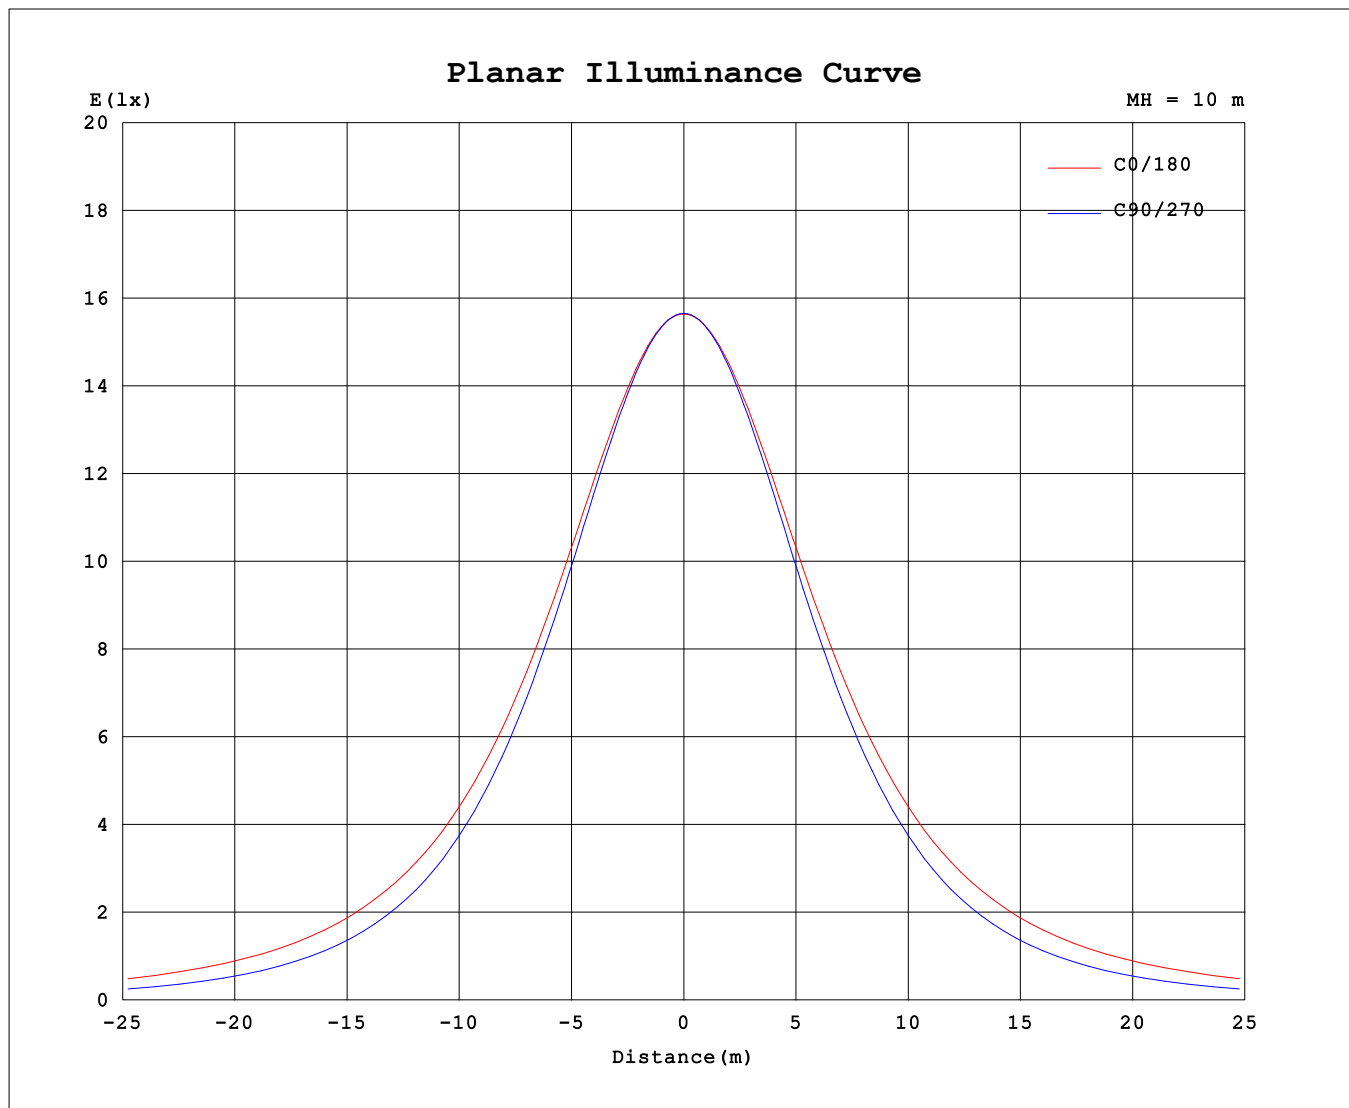

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: QC
 Test Date: 2024-06-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.458
 Humidity: 65.0%
 Test Distance: 10.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.28V I:0.2104A P:47.485W PF:0.9799 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:6812.03x1 lm		
NAME: TI60LE-LC-48-1500K-40H-R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565						
5	1560	1560	1558	1558	1558	1560	1560	1560	1558	1558	1558	1560						
10	1546	1544	1540	1538	1540	1544	1544	1540	1540	1538	1540	1544						
15	1523	1520	1511	1506	1511	1520	1523	1520	1511	1506	1511	1520						
20	1493	1486	1469	1461	1469	1486	1493	1486	1469	1461	1469	1486						
25	1456	1444	1417	1404	1417	1444	1456	1444	1417	1404	1417	1444						
30	1412	1394	1355	1335	1355	1394	1412	1394	1355	1335	1355	1394						
35	1363	1337	1282	1255	1282	1337	1363	1337	1282	1255	1282	1337						
40	1308	1274	1201	1164	1201	1274	1308	1274	1201	1164	1201	1274						
45	1248	1206	1113	1061	1113	1206	1248	1206	1113	1061	1113	1206						
50	1185	1133	1017	950	1017	1133	1185	1133	1017	950	1017	1133						
55	1119	1058	918	833	918	1058	1119	1058	918	833	918	1058						
60	1051	981	815	706	815	981	1051	981	815	706	815	981						
65	981	904	711	577	711	904	981	904	711	577	711	904						
70	910	826	611	446	611	826	910	826	611	446	611	826						
75	839	749	515	317	515	749	839	749	515	317	515	749						
80	768	675	425	196	425	675	768	675	425	196	425	675						
85	698	603	347	82.8	347	603	698	603	347	82.8	347	603						
90	630	535	281	10.3	281	535	630	535	281	10.3	281	535						
95	564	465	216	11.5	216	465	564	465	216	11.5	216	465						
100	501	401	179	13.5	179	401	501	401	179	13.5	179	401						
105	440	351	147	15.3	147	351	440	351	147	15.3	147	351						
110	383	303	118	17.4	118	303	383	303	118	17.4	118	303						
115	330	259	95.4	19.4	95.4	259	330	259	95.4	19.4	95.4	259						
120	282	219	79.7	21.3	79.7	219	282	219	79.7	21.3	79.7	219						
125	237	184	67.9	23.3	67.9	184	237	184	67.9	23.3	67.9	184						
130	198	144	59.0	25.1	59.0	144	198	144	59.0	25.1	59.0	144						
135	164	116	52.6	27.0	52.6	116	164	116	52.6	27.0	52.6	116						
140	134	94.7	47.8	29.0	47.8	94.7	134	94.7	47.8	29.0	47.8	94.7						
145	108	79.0	44.7	30.9	44.7	79.0	108	79.0	44.7	30.9	44.7	79.0						
150	87.4	66.1	42.6	32.7	42.6	66.1	87.4	66.1	42.6	32.7	42.6	66.1						
155	69.6	55.8	41.3	34.5	41.3	55.8	69.6	55.8	41.3	34.5	41.3	55.8						
160	56.9	48.4	40.5	36.1	40.5	48.4	56.9	48.4	40.5	36.1	40.5	48.4						
165	49.0	43.8	40.0	37.5	40.0	43.8	49.0	43.8	40.0	37.5	40.0	43.8						
170	43.1	41.1	39.7	38.8	39.7	41.1	43.1	41.1	39.7	38.8	39.7	41.1						
175	37.9	39.6	39.8	39.7	39.8	39.6	37.9	39.6	39.8	39.7	39.8	39.6						
180	37.3	39.2	39.9	40.2	39.9	39.2	37.3	39.2	39.9	40.2	39.9	39.2						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2024-06-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:10.700m [K=1.0000]
Remarks: